


# High-Performance USB Optical Video Inspection Probe

## For verification of connector quality

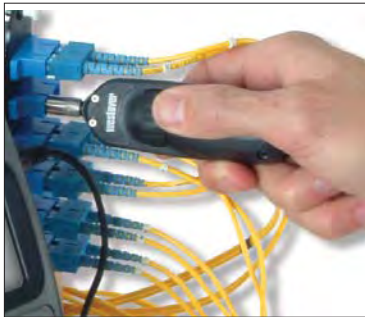

### Key Features

- Back panel or patchcord connector inspection
- High-resolution image for detailed damage investigation
- Convenient handling for field use
- USB connection for use in combination with JDSU's optical test platforms or directly with a PC



### Connector quality verification

Serving as a complementary tool with JDSU's optical test platforms during installation and maintenance, the High-Performance Optical Video Inspection Probe allows for quality verification of the front connector. The use of the video inspection probe allows for visualization of the connector in a safe environment, even when the fiber is active.

### Connect and view

The High-Performance Optical Video Inspection Probe is a portable microscope that is used to inspect fiber optic connectors. Whether the connector is front side or installed or located inside the hardware device or on the backside of patch panels, the video inspection probe eliminates the need to access the backside of patch panels or to disassemble the hardware device prior to inspection. Connected to the JDSU's optical test platforms, a clear and high-resolution image is displayed for connector qualification.

2007

FROST & SULLIVAN

Global Communications  
Test & Measurement  
Company of the Year Award



High-performance video inspection probe



The video inspection probe combined with the USB Digital Connection Kit



The Optical Video Inspection Probe System plugged into the T-BERD/MTS 8000's USB port

**A high-performance video inspection probe**

The small and lightweight video inspection probe contains a long-life coaxial LED light source and a 1/3" CCD video camera. A small focusing mechanism is conveniently positioned in the probe handle. Its multipurpose capability makes it suitable for field testing as well as manufacturing and lab environments.

**Features:**

- Convenient handling
- Easy hands-free operation for even the smallest connectors
- Accepts several types of connector-specific tips

**USB Digital Connection Kit**

The video inspection probe can be used in conjunction with the USB Digital Connection Kit to provide image capture and display functionality using JDSU's T-BERD/MTS optical test platforms or a PC.

**An enhanced testing solution using JDSU's T-BERD/MTS optical test platforms**


The video inspection probe can be combined with JDSU's T-BERD/MTS optical test platforms, allowing technicians to fully characterize the connector end face on a large 10.4" display and directly save the image on the test equipment.

The video inspection probe combined with JDSU's T-BERD/MTS optical test platforms offers:

- Automatic contrast and brightness adjustment
- Mosaic display for connector image comparison
- File saving capability using .jpg file format



Connector image display on the T-BERD/MTS optical test platforms

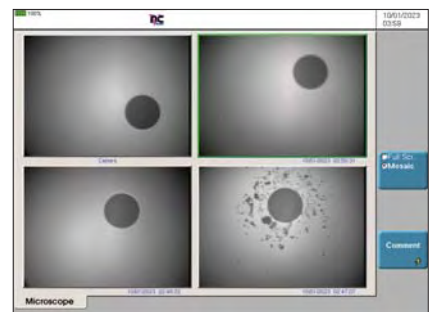

Mosaic display for online comparison before and after connector cleaning

**Supports a large variety of tips for bulkhead adapters and patchcord connectors**

The video inspection probe tip mates with the bulkhead or mating connector and pre-centers the image on the display, eliminating the need to “find” the image by moving the probe around the connector.

In addition to being compatible with standard connectors, such as ST, SC, and FC, the video inspection probe’s design includes precision optics and lighting, which have been optimized for inspecting small form factor connectors including 1.25-mm LC connectors.

## High-Performance USB Optical Video Inspection Probe

### General technical specifications (typical at 25°C)

#### High-Performance Optical Video Inspection Probe

Weight	4.08 oz (115.6 g)
Dimensions (W x H x L)	1.8 x 1.7 x 5.5 in (45.7 x 43.2 x 140 mm)
Optical magnification	200X or 400X using the 2.5" LCD
Camera type	1/3" CCD
Light source	Blue LED, internal to probe, 100,000+ hours
Lighting technique	Coaxial
Focus control	Adjustable, in-probe
Video output	NTSC or PAL
Power source	From HD1a or USB port of a PC
Attenuation filter	2-mm thick Schott KG1

#### USB Digital Connection Kit

USB type	1.0 and 1.1
----------	-------------

#### Adapter Tips

Connector-specific probe tips	ST, SC, FC, universal patchcord tips for 2.5-mm and 1.25-mm ferrule
-------------------------------	---

For additional probe tips, see ordering information.

### Ordering information

#### USB Optical Video Inspection Probe

EFSCOPE400	High-performance Optical Video Inspection Probe 200X/400X with USB connection
EFSCOPE200	High-performance Optical Video Inspection Probe 200X with USB connection

#### Accessories

EOCIS-SC1	Carrying case for the probe and accessories
-----------	---

#### Connectors and Adaptors

ETIPSCAPC	Optical inspection SC/APC tip, bulkhead adapter
ETIPE2000	Optical inspection E2000 tip, bulkhead adapter
ETIPSCPC	Optical inspection SC/PC tip, bulkhead adapter
ETIPU125MM	Optical inspection patchcord tip for 1.25-mm ferrule
ETIPU25MM	Optical inspection patchcord tip for 2.5-mm ferrule
ETIPFCAPC	Optical inspection FC/APC tip, bulkhead adapter
ETIPSTPC	Optical inspection ST/PC tip, bulkhead adapter
ETIPLC	Optical inspection LC tip for bulkhead adapter
ETIPFCPC	Optical inspection FC/PC tip, bulkhead adapter
ETIPMPOAPC	Optical inspection MPO/APC tip, bulkhead adapter
ETIPMPO	Optical inspection MPO tip, bulkhead adapter

Additional probe tips are available upon request. Please contact your local JDSU account representative for more information.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2007 JDS Uniphase Corporation. All rights reserved. 30137574 001 0707 USBOVP.DS.FOP.TM.AE